



**CUSTOMIZED
UNDER SCREED
HEATING PANEL
FOR INDOOR**

CUSTOMIZED UNDER SCREED HEATING PANEL FOR INDOOR



APPLICATION AREA

Underfloor heating panel is ideal for both types of working: new floors and renovations. Radiant heating principle of the system does not cause air movement and the bodies are heated directly, thus it is avoided dust and acrid circulation. Panels have customized sizes and power. Due to multilayer composition of the panel, heat is spread uniformly, resulting a minimal heat dispersion downwards of approximately 5%.

NO HARMFUL ELECTROMAGNETIC EMISSIONS

OPERATIONAL FEATURES

The application must be performed carefully on clean and plain surfaces. Extremely reduced thickness of the heating layer, of approximately 5,00 mm (0,2 inch approx.) allows interventions with minimal height. All the heating elements are connected to power in parallel, thus the system can operate even in case of partial damage, excluding from supply a floor area of 1,00 m² (10,76 ft²).

CARBON FIBER


Carbon fiber is flexible, does not oxidize, does not produce harmful electromagnetic fields during electricity flow, has no dimensional variations as the temperature changes nor deterioration of ohmic values. No wearing and no maintenance required. Its high resistivity permits significant energy savings.

COMPOSITION


Carbon fiber heating cables coated by insulating and thermal conductive layers. Total thickness of 5,00 mm (0,20 inch approx.).

TEMPERATURE CONTROL

Activation and deactivation of the heating system can be automatized using an electronic controller (T705) operating with temperature probe, which must be installed in the heated area. Some situations require the installation of power splitter (T801) for halving of the installed power in case of a reduced quantity of total power. Furthermore, the installation of a thermostat or chrono-thermostat is enough to control efficiently the temperature in the room.

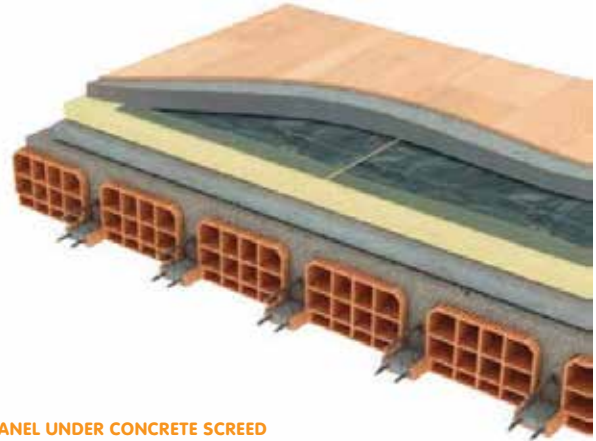

PANEL UNDER CONCRETE SCREED

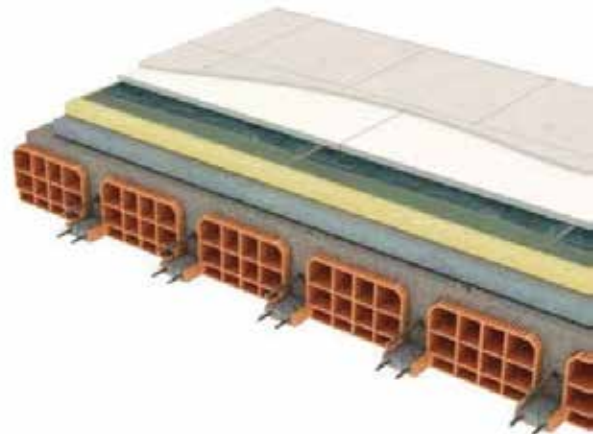

PANEL UNDER GYPSUM FIBER DRY SCREED PANELS

MODEL	POWER SUPPLY	POWER	PROTECTION DEGREE	TEMPERATURE CONTROL	CABLES AND CONNECTORS	DIMENSIONS
PVMI	230 Vac 50/60 Hz max 8A	from 25W/m ² to 100W/m ²	IP67	T705 temperature electronic control, optional, see accessories	FG7 power cable	on demand

CONFORMITY



This product is manufactured in conformity with the electrical safety standards set by Low Voltage Directive 2014/35/EU. This product is in conformity with Electromagnetic Compatibility Directive 2014/30/EU, concerning the standards for electromagnetic emissions.

Thermal Technology powered by Carbon Fiber Heating SRL - 417075, Borş, Parc Industrial Borş, Nr. 1C, jud. Bihor, Romania
Phone: + 39 0423 858589 - www.thermaltt.com - info@thermaltt.com